

A800



PRODUCT INFORMATION

The A800 is the latest innovation from Franke Coffee Systems, designed to deliver high quantities of top-quality beverages in a flash. The professional three boiler system can handle multiple drinks with ease. A 10-inch touchscreen invites you to select your desired beverage with its intuitive menu navigation.

The patented brew unit was designed to improve extraction results even further. The unit is precisely adjusted to the extraction grade that is needed to offer a wide range of beverages. It can be removed quickly and easily from the front without tools, making the machine exceptionally easy to service.

The A800 is the perfect solution for restaurants, convenience stores, quick-serve restaurants, schools, offices, and much more.

FEATURES

- Intuitive touchscreen navigation on 10-inch panel
- Programmable milk quality and temperature settings for each product
- Patented brew unit
- Up to three grinders
- Three boilers for hot water, coffee preparation, and steam for high capacity levels
- Autosteam steam wand (enhanced milk foaming) or Autosteam Pro (automatic milk foaming)
- Maximum energy efficiency
- Integrated cleaning process
- Professional installation and 1 year scheduled maintenance program available
- 12 months parts and labor warranty

*Make
it
Wonderful*

FRANKE

MACHINE MODELS

MODEL	POWER
A800	4.5-5.3 kW
A800 FM	4.5-5.3 kW

(other connection types upon request)

ACCESSORIES

A800 FM	POWER
1) Refrigeration unit SU10 (12l)	100 W

2) REFRIGERATION UNIT SU05 (5l)

Electrical connection: 110V 1 LN PE 60 Hz 15 A

Power: 72 W

Dimensions: 10.83"/21.26"/17.75" (W/H/D)

Weight (empty): approx. 57 lbs

Compatible with: Model A600 MS

COLOR

Gloss black

ELECTRICAL CONNECTION

A800 208V 2LE PE 22.4-24.2A/4.5kW-5.3kW

On all models and devices 200-240 V 1LNPE 50/60Hz 10A

WATER CONNECTION

Fixed water connection Metal hose with union nut G3/8", L = 4.92 feet

Water pressure 80 to 800 kPa (0.8 to 8.0 bar)






Water hardness max. 70 mg CaO per liter of water (7 dH, 13 °fH)

Chloride content max. 100 mg/IPPM

Ideal pH value 7

WATER DRAIN

Drain hose 2 x 1" vented, 3/4" vented

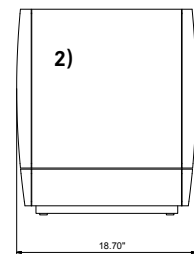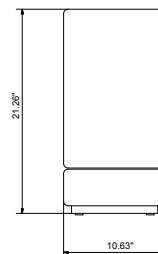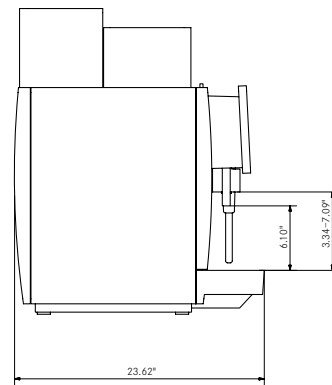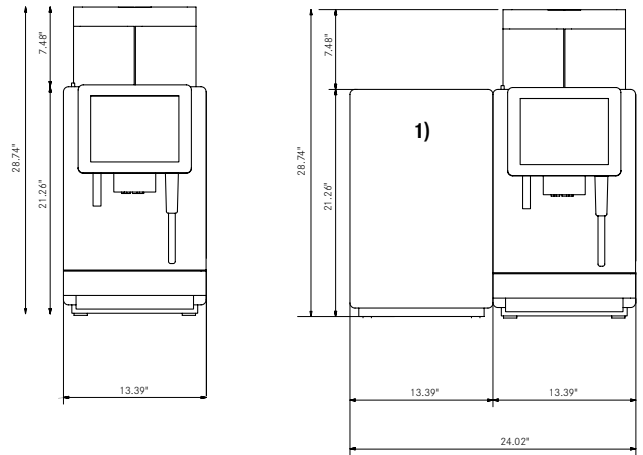

Franke Coffee Systems North America
 800 Aviation Parkway
 Smyrna TN 37167
 T + 1 877 379 3769
 coffee.franke.com

